



## AROS E TAMPAS DE SARJETA, TAMPAS PARA POÇOS


## AROS DE SARJETA

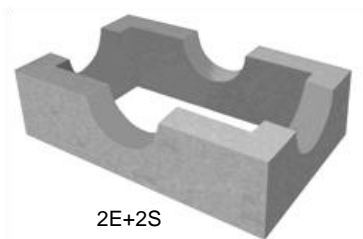

2E+2S





1E+1S



1E+1S a 45°

TAMPAS DE SARJETA  
Com grade antirroubo C250


## TAMPAS DE POÇOS

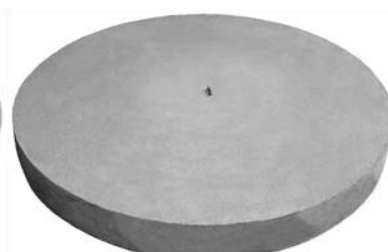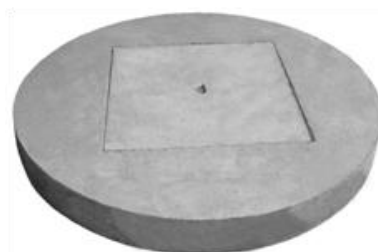

## Aros e tampas de sarjeta e tampas de poços pré-fabricados em betão

## CARACTERÍSTICAS

Designação		Dimensões (mm)				Peso Aprox. (kg)
		Diam.	Comp.	Larg.	Alt.	
Aro de Sarjeta	Normal (sem E e sem S)	---	900	550	250	135.0
	Com 1E+1S	---	900	550	250	128.0
	Com 2E+2S	---	900	550	250	117.5
	Com 1E+1S a 45°	---	900	550	250	125.5
Tampa de Sarjeta com Grade Antirroubo C250		---	900	550	160	145.0
Tampa de Poço (aberta ou fechada)		1200	---	---	125	320.0
		1400	---	---	125	440.0

E – Entrada; S – Saída